

# 102(13/15/11) - Datasheet

## FLANGE-MOUNTED TYPE


### Specifications

Model	Size	Dynamic friction torque $T_d$ [N·m]	Coil [at 20 °C]				Heat resistance class	Lead wire		Max. rotation speed [min <sup>-1</sup> ]	Rotating part moment of inertia J		Allowable engaging energy rate $E_{ea\ell}$ [J]	Total work performed until readjustment of the air gap $E_r$ [J]	Armature pull-in time $t_a$ [s]	Torque build-up time $t_p$ [s]	Torque decrease time $t_d$ [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [ $\Omega$ ]		UL style	Size		Armature [kg·m <sup>2</sup> ]	Rotor [kg·m <sup>2</sup> ]						
102-02-13									10000	6.75 × 10 <sup>-7</sup>								0.075
102-02-15	02	0.4	DC24	6	0.25	96	B	UL3398	AWG26	500	1.00 × 10 <sup>-6</sup>	2.45 × 10 <sup>-6</sup>	1500	2 × 10 <sup>6</sup>	0.009	0.019	0.017	0.081
102-02-11										10000	1.00 × 10 <sup>-6</sup>							0.079
102-03-13										10000	1.30 × 10 <sup>-6</sup>							0.096
102-03-15	03	0.6	DC24	6	0.25	96	B	UL3398	AWG26	500	1.95 × 10 <sup>-6</sup>	3.25 × 10 <sup>-6</sup>	2300	3 × 10 <sup>6</sup>	0.009	0.022	0.020	0.105
102-03-11										10000	1.95 × 10 <sup>-6</sup>							0.103
102-04-13										10000	4.38 × 10 <sup>-6</sup>							0.178
102-04-15	04	1.2	DC24	8	0.33	72	B	UL3398	AWG26	500	6.15 × 10 <sup>-6</sup>	1.41 × 10 <sup>-5</sup>	4500	6 × 10 <sup>6</sup>	0.011	0.028	0.030	0.195
102-04-11										10000	6.15 × 10 <sup>-6</sup>							0.191
102-05-13										10000	9.08 × 10 <sup>-6</sup>							0.310
102-05-15	05	2.4	DC24	10	0.42	58	B	UL3398	AWG22	500	1.38 × 10 <sup>-5</sup>	3.15 × 10 <sup>-5</sup>	9000	9 × 10 <sup>6</sup>	0.012	0.031	0.040	0.335
102-05-11										10000	1.38 × 10 <sup>-5</sup>							0.325

- The dynamic friction torque,  $T_d$ , is measured at a relative speed of 100 min<sup>-1</sup>.
- The moment of inertia of a rotating body and mass are specified for the maximum bore diameter.
- Keep supply voltage fluctuation to within 10% of coil voltage. In case of use, the current feed may only be ≤ 80% of the operating time.

### Dimensions (102-□-13)

#### For direct mounting

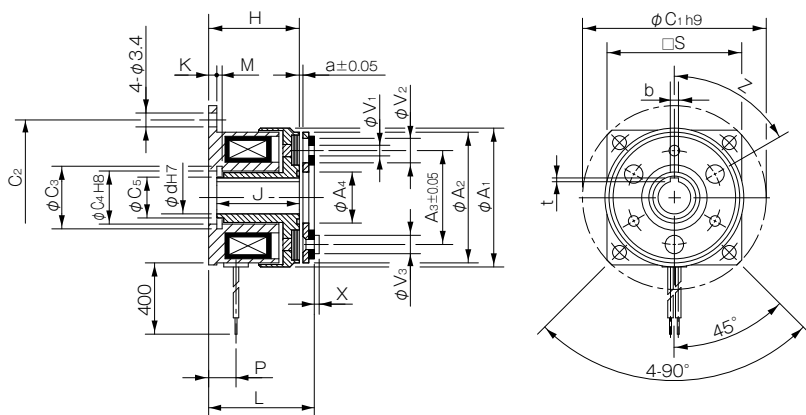

Size	d <sub>1</sub> H7	Shaft bore dimensions			
		Models compliant with the new JIS standards		Models compliant with the old JIS standards	
		b p9	t	b E9	t
02	5	-	-	-	-
03	6	2 <sup>-0.006</sup> <sub>-0.031</sub>	0.8 <sup>+0.3</sup> <sub>0</sub>	-	-
04	8	2 <sup>-0.006</sup> <sub>-0.031</sub>	0.8 <sup>+0.3</sup> <sub>0</sub>	-	-
	10	3 <sup>-0.006</sup> <sub>-0.031</sub>	1.2 <sup>+0.3</sup> <sub>0</sub>	4 <sup>+0.050</sup> <sub>+0.020</sub>	1.5 <sup>+0.5</sup> <sub>0</sub>
5	10	3 <sup>-0.006</sup> <sub>-0.031</sub>	1.2 <sup>+0.3</sup> <sub>0</sub>	4 <sup>+0.050</sup> <sub>+0.020</sub>	1.5 <sup>+0.5</sup> <sub>0</sub>
	15	5 <sup>-0.012</sup> <sub>-0.042</sub>	2 <sup>+0.5</sup> <sub>0</sub>	5 <sup>+0.050</sup> <sub>+0.020</sub>	2 <sup>+0.5</sup> <sub>0</sub>

Size	Radial directions dimensions										Axial directions dimensions											
	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	A <sub>4</sub>	C <sub>1</sub>	C <sub>2</sub>	C <sub>3</sub>	C <sub>4</sub>	C <sub>5</sub>	S	V <sub>1</sub>	V <sub>2</sub>	V <sub>3</sub>	Z	H	J	K	L	P	M	a	X
02	31	28	19.5	10.5	39	33.5	11.4	11	8	-	2-2.1	2-5.3	2-3.7	4-90°	18	16.5	1.5	20.4	4.9	1.1	0.1	0.8
03	34	32	23	12.5	45	38	13.6	13	10	33	3-2.6	3-6	3-4.5	6-90°	22.2	20.2	2	24.5	6.7	1.3	0.15	1.2
04	43	40	30	18.5	54	47	20	19	15.5	41	3-3.1	3-6	3-5	6-90°	25.4	23.4	2	28.1	7.2	1.3	0.15	1.6
05	54	50	38	25.5	65	58	27.2	26	22	51	3-3.1	3-6.5	3-5.5	6-90°	28.1	26.1	2	31.3	8.2	1.5	0.2	1.5

- Size 02 is a rounded flange.
- The rotor of size 02 has no keyway. Lock it in place by press-fitting it onto the shaft.


**How to Place an Order**

102-03-13 24V 6DIN

Size — Rotor bore diameter (dimensional symbol d) — Keyway standards — DIN: Compliant with the new JIS standards — JIS: Compliant with the old JIS standards

## ■ Dimensions (102-□-15)

■ For through-shafts

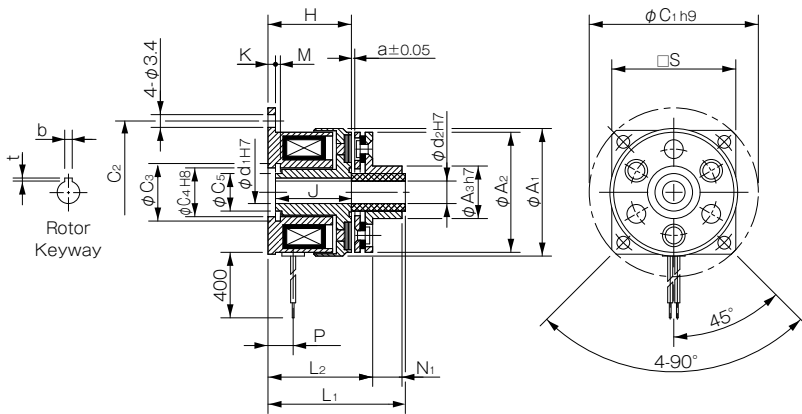

Size	Shaft bore dimensions					
	d1 H7	d2 H7	Models compliant with the new JIS standards		Models compliant with the old JIS standards	
			b P9	t	b E9	t
02	5	5	-	-	-	-
03	6	6	2	0.8	-	-
			-0.006 -0.031	+0.3 0	-	-
04	8	8	2	0.8	-	-
			-0.006 -0.031	+0.3 0	-	-
10	10	3	-0.006 -0.031	1.2	4	1.5
			+0.050 +0.020	+0.3 0	+0.050 +0.020	+0.5 0
5	15	5	-0.012 -0.042	2	5	2
			+0.050 +0.020	+0.5 0	+0.050 +0.020	+0.5 0

Size	Radial directions dimensions									Axial directions dimensions								
	A1	A2	A3	C1	C2	C3	C4	C5	S	H	J	K	L1	L2	M	P	N1	a
02	31	28	13	39	33.5	11.4	11	8	-	18	16.5	1.5	27.7	22.4	1.1	4.9	4.8	0.1
03	34	32	14	45	38	13.6	13	10	33	22.2	20.2	2	34.5	26.5	1.3	6.7	7.8	0.15
04	43	40	18	54	47	20	19	15.5	41	25.4	23.4	2	40.2	30.8	1.3	7.2	9.1	0.15
05	54	50	28	65	58	27.2	26	22	51	28.1	26.1	2	43.3	34.3	1.5	8.2	8.8	0.2

- Size 02 is a rounded flange.
- The rotor of size 02 has no keyway. Lock it in place by press-fitting it onto the shaft.


**How to Place an Order**

102-03-15 24V R6DIN A6

Size 102-03-15 Armature bore diameter (dimensional symbol d2)  
 Rotor bore diameter (dimensional symbol d1) 24V Keyway standards R6DIN DIN: Compliant with the new JIS standards  
 JIS: Compliant with the old JIS standards

## ■ Dimensions (102-□-11)

■ For butt shafts

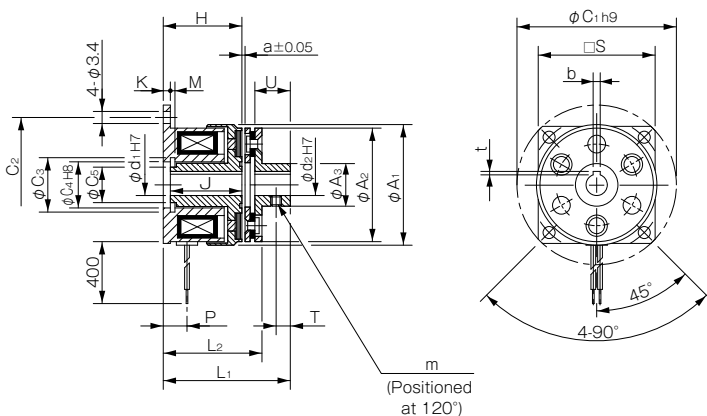

Size	Shaft bore dimensions					
	d1 H7	d2 H7	Models compliant with the new JIS standards		Models compliant with the old JIS standards	
			b P9	t	b E9	t
02	5	5	-	-	-	-
03	6	6	2	0.8	-	-
			-0.006 -0.031	+0.3 0	-	-
04	8	8	2	0.8	-	-
			-0.006 -0.031	+0.3 0	-	-
10	10	3	-0.006 -0.031	1.2	4	1.5
			+0.050 +0.020	+0.3 0	+0.050 +0.020	+0.5 0
5	15	5	-0.012 -0.042	2	5	2
			+0.050 +0.020	+0.5 0	+0.050 +0.020	+0.5 0

Size	Radial directions dimensions									Axial directions dimensions										
	A1	A2	A3	C1	C2	C3	C4	C5	S	m	H	J	K	L1	L2	M	P	U	T	a
02	31	28	9.5	39	33.5	11.4	11	8	-	M3	18	16.5	1.5	27.4	22.4	1.1	4.9	7	2.5	0.1
03	34	32	12	45	38	13.6	13	10	33	2-M3	22.2	20.2	2	34.5	26.5	1.3	6.7	10	4	0.15
04	43	40	17	54	47	20	19	15.5	41	2-M3	25.4	23.4	2	40.1	30.8	1.3	7.2	12	5	0.15
05	54	50	24	65	58	27.2	26	22	51	2-M4	28.1	26.1	2	43.3	34.3	1.5	8.2	12	5	0.2

- Size 02 is a rounded flange.
- The rotor of size 02 has no keyway. Lock it in place by press-fitting it onto the shaft.

**How to Place an Order**

102-03-11 24V R6DIN A6DIN

Size 102-03-11 Keyway standards R6DIN DIN: Compliant with the new JIS standards  
 Rotor bore diameter (dimensional symbol d1) 24V JIS: Compliant with the old JIS standards  
 Armature bore diameter (dimensional symbol d2) A6DIN Keyway standards A6DIN DIN: Compliant with the new JIS standards  
 JIS: Compliant with the old JIS standards

# 102(33/35/31) - Datasheet

## BEARING-MOUNTED TYPE


### Specifications

Model	Size	Dynamic friction torque $T_d$ [N·m]	Coil [at 20 °C]				Heat resistance class	Lead wire		Max. rotation speed [min <sup>-1</sup> ]	Rotating part moment of inertia J		Allowable engaging energy rate $E_{ea}$ [J]	Total work performed until readjustment of the air gap $E_r$ [J]	Armature pull-in time $t_a$ [s]	Torque build-up time $t_p$ [s]	Torque decrease time $t_d$ [s]	Mass [kg]
			Voltage [V]	Wattage [W]	Current [A]	Resistance [ $\Omega$ ]		UL style	Size		Armature [kg·m <sup>2</sup> ]	Rotor [kg·m <sup>2</sup> ]						
102-02-33											$6.75 \times 10^{-7}$							0.076
102-02-35	02	0.4	DC24	6	0.25	96	B	UL3398	AWG26	500	$1.00 \times 10^{-6}$	$2.75 \times 10^{-6}$	1500	$2 \times 10^6$	0.009	0.019	0.017	0.082
102-02-31											$1.00 \times 10^{-6}$							0.080
102-03-33											$1.30 \times 10^{-6}$							0.101
102-03-35	03	0.6	DC24	6	0.25	96	B	UL3398	AWG26	500	$1.95 \times 10^{-6}$	$4.08 \times 10^{-6}$	2300	$3 \times 10^6$	0.009	0.022	0.020	0.110
102-03-31											$1.95 \times 10^{-6}$							0.108
102-04-33											$4.38 \times 10^{-6}$							0.183
102-04-35	04	1.2	DC24	8	0.33	72	B	UL3398	AWG26	500	$6.15 \times 10^{-6}$	$1.44 \times 10^{-5}$	4500	$6 \times 10^6$	0.011	0.028	0.030	0.200
102-04-31											$6.15 \times 10^{-6}$							0.196
102-05-33											$9.08 \times 10^{-6}$							0.321
102-05-35	05	2.4	DC24	10	0.42	58	B	UL3398	AWG22	600	$1.38 \times 10^{-5}$	$2.90 \times 10^{-5}$	9000	$9 \times 10^6$	0.012	0.031	0.040	0.346
102-05-31											$1.38 \times 10^{-5}$							0.336

- The dynamic friction torque,  $T_d$ , is measured at a relative speed of 100 min<sup>-1</sup>.
- The moment of inertia of a rotating body and mass are specified for the maximum bore diameter.
- Keep supply voltage fluctuation to within 10% of coil voltage. In case of use, the current feed may only be  $\leq 80\%$  of the operating time.

### Dimensions (102-□-33)

#### For direct mounting

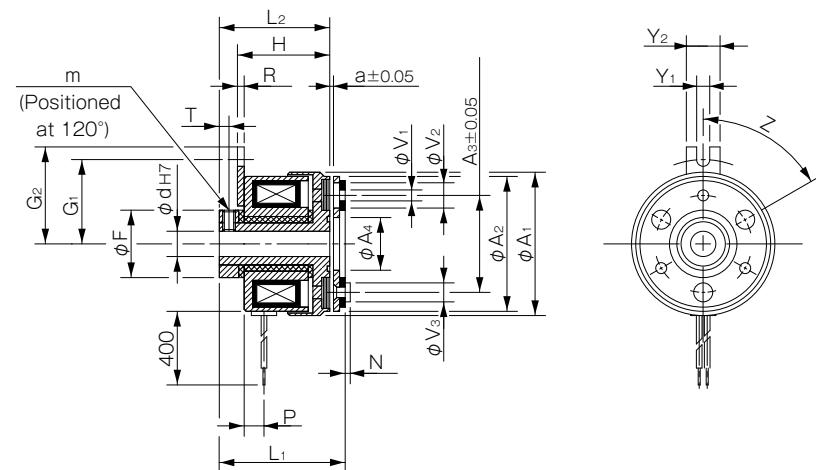

Size	Shaft bore dimensions	
	d H7	
02	5	
03	6	
04	8	
	10	
5	10	
	15	


Size	Radial directions dimensions										Axial directions dimensions											
	A1	A2	A3	A4	F	V1	V2	V3	G1	G2	Y1	Y2	Z	m	H	R	L1	L2	P	N	T	a
02	31	28	19.5	10.5	14	2-2.1	2-5.3	2-3.7	15.8	19.8	3.1	8	4-90°	2-M3	19.1	1.2	25.9	23.5	4.9	0.8	2.5	0.1
03	34	32	23	12.5	16	3-2.6	3-6	3-4.5	20	23	3.1	8	6-60°	2-M3	22	1.6	28.5	26.2	4.7	1.2	2.3	0.15
04	43	40	30	18.5	22	3-3.1	3-6	3-5	23	26	3.1	8	6-60°	2-M4	25.2	1.6	33.1	30.4	5.2	1.5	2.8	0.15
05	54	50	38	25.5	30	3-3.1	3-6.5	3-6	28	31	3.1	8	6-60°	2-M5	27.9	1.6	37.3	34.1	6.2	1.5	3.3	0.2

How to Place an Order

102-03-33 24V 6  
 Size Rotor bore diameter (dimensional symbol d)

## ■ Dimensions (102-□-35)

■ For through-shafts

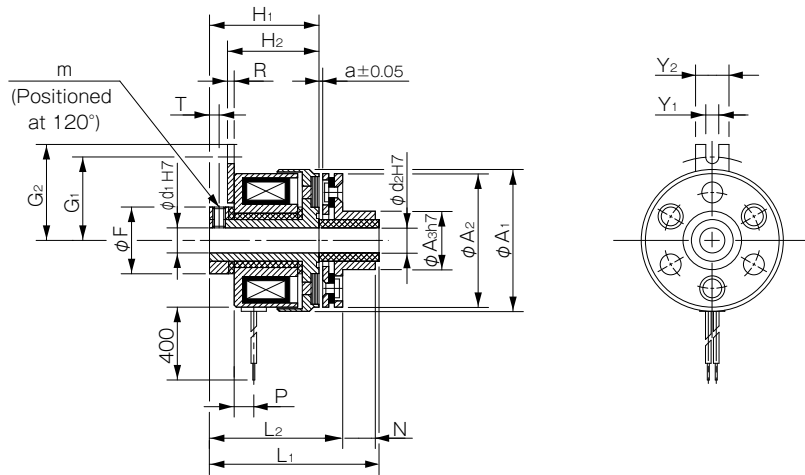

Size	Shaft bore dimensions	
	d1 H7	d2 H7
02	5	5
03	6	6
04	8	8
5	10	10
	15	15

Size	Radial directions dimensions									Axial directions dimensions									
	A1	A2	A3	F	G1	G2	Y1	Y2	m	H1	H2	R	L1	L2	P	N	T	a	
02	31	28	13	14	15.8	20	3.1	8	2-M3	23.5	19.1	1.2	33	27.9	4.9	4.8	2.5	0.1	
03	34	32	14	16	20	23	3.1	8	2-M3	26.2	22	1.6	38.5	30.5	4.7	7.8	2.3	0.15	
04	43	40	18	22	23	26	3.1	8	2-M4	30.4	25.2	1.6	45.2	35.8	5.2	9.1	2.8	0.15	
05	54	50	28	30	28	31	3.1	8	2-M5	34.1	27.9	1.6	49.3	40.3	6.2	8.8	3.3	0.2	

How to Place an Order


102-03-35 24V R6 A6

Size

Armature bore diameter (dimensional symbol d2)  
Rotor bore diameter (dimensional symbol d1)

## ■ Dimensions (102-□-31)

■ For butt shafts

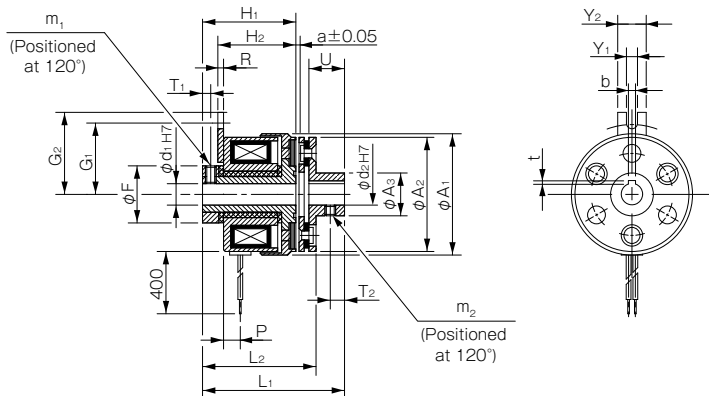

Size	Shaft bore dimensions					
	d1 H7	d2 H7	Models compliant with the new JIS standards		Models compliant with the old JIS standards	
			b P9	t	b E9	t
02	5	5	-	-	-	-
03	6	6	2	-0.006 -0.031	0.8	+0.3 0
			-	-	-	-
04	8	8	2	-0.006 -0.031	0.8	+0.3 0
			-	-	-	-
5	10	10	3	-0.006 -0.031	1.2	+0.3 0
			4	+0.050 +0.020	1.5	+0.5 0
5	15	15	5	-0.012 -0.042	2	+0.5 0
			5	+0.050 +0.020	2	+0.5 0

Size	Radial directions dimensions										Axial directions dimensions									
	A1	A2	A3	F	G1	G2	Y1	Y2	m1	m2	H1	H2	R	L1	L2	P	U	T1	T2	a
02	31	28	9.5	14	15.8	20	3.1	8	2-M3	M3	23.5	19.1	1.2	32.9	27.9	4.9	7	2.5	2.5	0.1
03	34	32	12	16	20	23	3.1	8	2-M3	2-M3	26.2	22	1.6	38.5	30.5	4.7	10	2.3	4	0.15
04	43	40	17	22	23	26	3.1	8	2-M4	2-M3	30.4	25.2	1.6	45.1	35.8	5.2	12	2.8	5	0.15
05	54	50	24	30	28	31	3.1	8	2-M5	2-M4	34.1	27.9	1.6	49.3	40.3	6.2	12	3.3	5	0.2

How to Place an Order

102-03-31 24V R6 A6DIN

Size

Rotor bore diameter (dimensional symbol d1)

Keyway standards DIN: Compliant with the new JIS standards  
JIS: Compliant with the old JIS standards

Armature bore diameter (dimensional symbol d2)