


# U - Datasheet

## Specifications

Model		UB-160						UC-210			UC-260						
Belt in use		A belt x 1			B belt x 1			B belt x 1			B belt x 1			C belt x 1			
Speed change ratio		1 : 5			1 : 3			1 : 6			1 : 6			1 : 3			
Transmission capacity [kW]		0.4 ~ 0.75						0.75			1.5 ~ 2.2						
Driven shaft rotation speed		Max.	Inter-mediate	Min.	Max.	Inter-mediate	Min.	Max.	Inter-mediate	Min.	Max.	Inter-mediate	Min.	Max.	Inter-mediate	Min.	
Transmission capacity [kW]	Motor pulley's external diameter [in]	3 ½	0.45	0.67	0.2	0.52	0.52	0.52	0.52	0.52	0.3	0.52	0.52	0.45			
		4	0.52	0.9	0.26	0.67	0.67	0.52	0.67	0.67	0.33	0.67	0.67	0.48			
		4 ½	0.6	1.12	0.3	0.9	1.05	0.56	0.82	1.05	0.37	1.05	1.05	0.56			
		5	0.67	1.27	0.33	0.97	1.42	0.6	0.9	1.42	0.41	1.27	1.42	0.63	1.35	1.35	1.35
		5 ½	0.75	1.37	0.37	1.05	1.57	0.63	0.97	1.8	0.45	1.42	1.8	0.71			
		6	0.85	1.42	0.37	1.2	1.65	0.67	1.05	2.25	0.52	1.5	2.25	0.75	2.25	3.0	1.35
		6 ½							1.2	2.4	0.6	1.6	2.62	0.82			
		7							1.35	2.47	0.67	1.8	3.0	0.9	2.4	3.37	1.42
8													2.55	4.5	1.5		
Mass [kg]		14			14			20			34			34			

## Dimensions

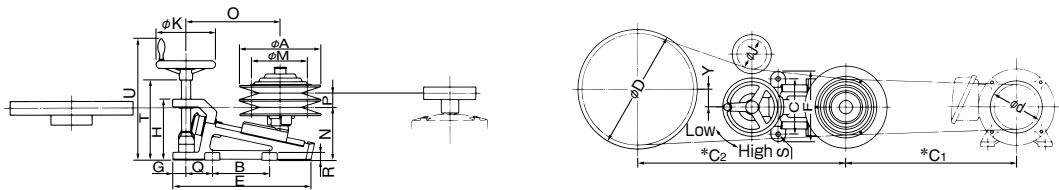

Model	A	B	C	E	F	G	H	J	K	N	P	Q	R	S	T	U	M	O	Number of handle turns	Movement distance
UB-160	170	120	115	295	145	30	125	70	125	108	29	56	15	11.5	175	270	116 127	190	24 17	75 53
UC-210	212	140	150	350	180	30	140	70	140	118	37	85	16	11.5	202	298	142	225	30	92
UC-260	260	160	160	415	200	30	157	70	160	154	43	107	17	14	246	363	174 188	250	37 29	116 82

\* M: Medium pitch diameter

**How to Place an Order**

