

## Metal Coil Spring Couplings

**BAUMANNFLEX**

High  
flexibility



High  
torque



Stainless  
steel


|                                   |                                                            |
|-----------------------------------|------------------------------------------------------------|
| Max. nominal torque [N·m]         | 220                                                        |
| Pilot bore/added work ranges [mm] | Ø 3 ~ 35                                                   |
| Operating temperature [°C]        | BAUMANN MINI FLEX: -40 to 120,<br>BAUMANNFLEX: -30 to 100  |
| Backlash                          | Insignificant                                              |
| Drive                             | Induction motor                                            |
| Applications                      | Vacuum equipment, medical<br>equipment, printing machinery |

**Metal Coil Spring Couplings with Excellent Flexibility**

These couplings connect hubs that mount on shafts to other hubs, separated by a metal coil spring. They achieve excellent flexibility, compact size, and high torque.



## Available Models

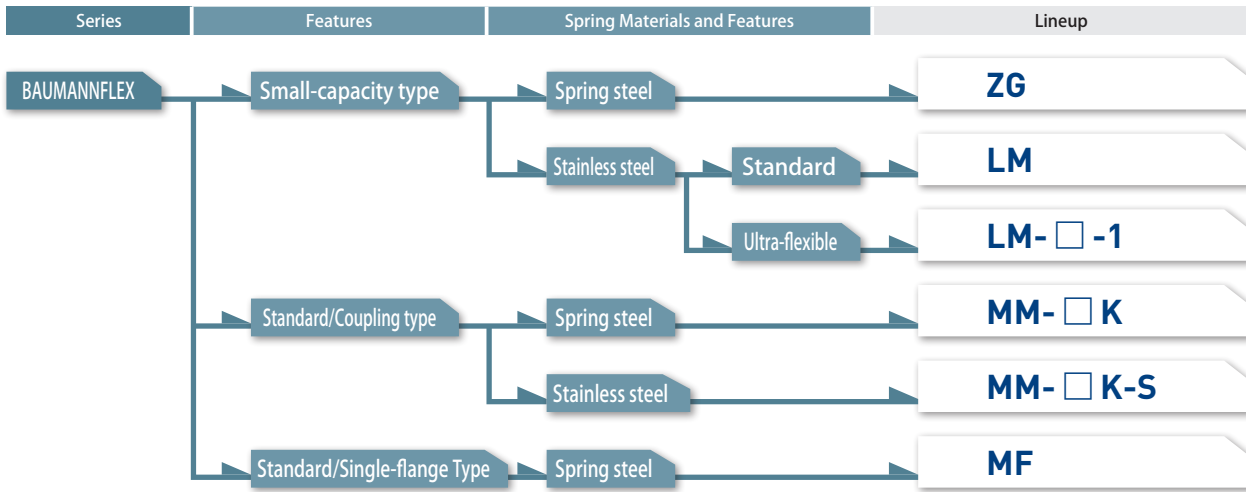


## Main Features

Allows angular deflection up to 14°



ZG • LM


Three-layer coil makes it compact with high torque

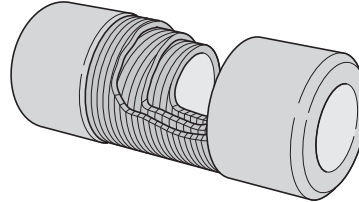

MM • MF

## Structure and Materials

### BAUMANN MINI FLEX ZG




### BAUMANN MINI FLEX LM



### BAUMANNFLEX MM(K)



### BAUMANNFLEX MM(K-S)

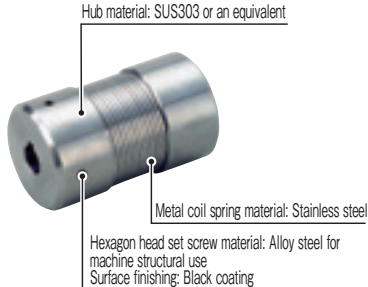

### BAUMANNFLEX MF(K)



## COUPLINGS

ETP BUSHINGS

ELECTROMAGNETIC CLUTCHES & BRAKES

SPEED CHANGERS & REDUCERS

INVERTERS

LINEAR SHAFT DRIVES

TORQUE LIMITERS

ROSTA

## SERIES

|                              |                              |
|------------------------------|------------------------------|
| Metal Disc Couplings         | SERVOFLEX                    |
|                              | High-rigidity Couplings      |
|                              | SERVORIGID                   |
|                              | Metal Slit Couplings         |
| Metal Coil Spring Couplings  | HELI-CAL                     |
|                              | BAUMANNFLEX                  |
| Pin Bushing Couplings        | PARAFLEX                     |
|                              | Link Couplings               |
| Rubber and Plastic Couplings | SCHMIDT                      |
|                              | Dual Rubber Couplings        |
|                              | STEPFLEX                     |
|                              | Jaw Couplings                |
|                              | MIKI PULLEY                  |
|                              | STARFLEX                     |
|                              | Jaw Couplings                |
|                              | SPRFLEX                      |
|                              | Plastic Bellows Couplings    |
|                              | BELLOWFLEX                   |
|                              | Rubber and Plastic Couplings |
|                              | CENTAFLEX                    |

## MODELS

ZG

LM

MM

MF

# ZG Models


## Specifications

| Model | Torque           |               | Misalignment     |                |               | Max.<br>rotation speed<br>[min <sup>-1</sup> ] | Torsional<br>stiffness<br>[N-m/rad] | Moment<br>of inertia<br>[kg-m <sup>2</sup> ] | Mass<br>[kg] |
|-------|------------------|---------------|------------------|----------------|---------------|------------------------------------------------|-------------------------------------|----------------------------------------------|--------------|
|       | Nominal<br>[N-m] | Max.<br>[N-m] | Parallel<br>[mm] | Angular<br>[°] | Axial<br>[mm] |                                                |                                     |                                              |              |
| ZG-6  | 0.15             | 0.3           | 0.5              | 5              | ± 0.5         | 3000                                           | 0.17                                | $1.95 \times 10^{-7}$                        | 0.020        |
| ZG-8  | 0.5              | 1.0           | 1.0              | 8              | ± 1.0         | 3000                                           | 0.48                                | $1.02 \times 10^{-6}$                        | 0.070        |
| ZG-14 | 1.5              | 3.0           | 1.2              | 8              | ± 1.0         | 3000                                           | 1.70                                | $1.15 \times 10^{-5}$                        | 0.130        |

\* Max. rotation speed does not take into account dynamic balance.

\* The moment of inertia and mass are measured for the maximum bore diameter.

## Dimensions

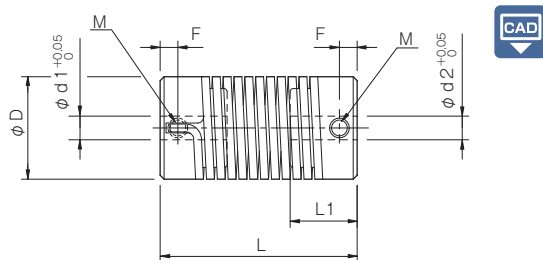

Unit [mm]

| Model | d1 · d2    |      |      | D  | L  | L1   | F   | M  |
|-------|------------|------|------|----|----|------|-----|----|
|       | Pilot bore | Min. | Max. |    |    |      |     |    |
| ZG-6  | 2          | 3    | 6    | 12 | 25 | 9    | 2.4 | M3 |
| ZG-8  | 3          | 4    | 8    | 16 | 35 | 12.5 | 3.5 | M4 |
| ZG-14 | 6          | 7    | 14   | 26 | 50 | 17   | 4.5 | M5 |

\* Pilot bores are to be drilled into the part.

\* Left and right tap positions may be shifted slightly.

## Standard Bore Diameter

| Model | Standard bore diameter d1, d2 |   |   |   |      |   |   |   |     |       |    |    |    |      |    |
|-------|-------------------------------|---|---|---|------|---|---|---|-----|-------|----|----|----|------|----|
|       | 3                             | 4 | 5 | 6 | 6.35 | 7 | 8 | 9 | 9.5 | 9.525 | 10 | 11 | 12 | 12.7 | 14 |
| ZG-6  | ●                             | ● | ● | ● |      |   |   |   |     |       |    |    |    |      |    |
| ZG-8  |                               | ● | ● | ● | ●    | ● | ● |   |     |       |    |    |    |      |    |
| ZG-14 |                               |   |   |   |      | ● | ● | ● | ●   | ●     | ●  | ●  | ●  | ●    | ●  |

\* Standard bore-drilled products do not have keyways. Keyways may be possible under some conditions. Contact Miki Pulley for details.

## How to Place an Order

**ZG-14 10-14**

Size  Bore diameter: d1 (Small diameter)  
- d2 (Large diameter)  
Blank: Pilot bore


## Specifications

| Model   | Torque           |               | Misalignment     |                |               | Max. rotation speed<br>[min <sup>-1</sup> ] | Torsional stiffness<br>[N·m/rad] | Moment of inertia<br>[kg·m <sup>2</sup> ] | Mass<br>[kg] |
|---------|------------------|---------------|------------------|----------------|---------------|---------------------------------------------|----------------------------------|-------------------------------------------|--------------|
|         | Nominal<br>[N·m] | Max.<br>[N·m] | Parallel<br>[mm] | Angular<br>[°] | Axial<br>[mm] |                                             |                                  |                                           |              |
| LM-6    | 0.5              | 1.0           | 1.0              | 8              | ± 1.0         | 6000                                        | 0.77                             | $5.10 \times 10^{-7}$                     | 0.020        |
| LM-6-1  | 0.5              | 1.0           | 3.0              | 14             | ± 1.5         | 6000                                        | 0.40                             | $7.65 \times 10^{-7}$                     | 0.030        |
| LM-9    | 1.0              | 2.0           | 2.5              | 8              | ± 1.0         | 6000                                        | 1.55                             | $2.55 \times 10^{-6}$                     | 0.050        |
| LM-9-1  | 1.0              | 2.0           | 4.0              | 14             | ± 1.5         | 6000                                        | 0.80                             | $3.06 \times 10^{-6}$                     | 0.060        |
| LM-14   | 2.0              | 4.0           | 3.0              | 8              | ± 1.0         | 6000                                        | 3.10                             | $7.65 \times 10^{-6}$                     | 0.090        |
| LM-14-1 | 2.0              | 4.0           | 4.5              | 14             | ± 1.5         | 6000                                        | 1.60                             | $9.44 \times 10^{-6}$                     | 0.110        |

\* Max. rotation speed does not take into account dynamic balance.

\* The moment of inertia and mass are measured for the maximum bore diameter.

## Dimensions

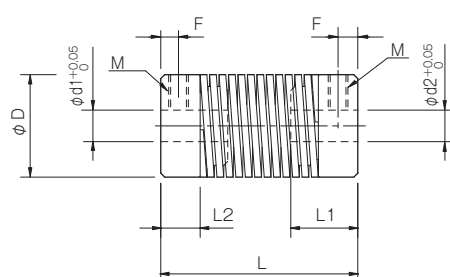

| Model   | d1 • d2    |      |      | D  | L  | L1 | L2  | F   | M  |
|---------|------------|------|------|----|----|----|-----|-----|----|
|         | Pilot bore | Min. | Max. |    |    |    |     |     |    |
| LM-6    | 4          | 5    | 6    | 14 | 35 | 12 | 6.5 | 3.5 | M4 |
| LM-6-1  | 4          | 5    | 6    | 14 | 50 | 12 | 6.5 | 3.5 | M4 |
| LM-9    | 5          | 6    | 9    | 20 | 40 | 14 | 7.5 | 4   | M4 |
| LM-9-1  | 5          | 6    | 9    | 20 | 60 | 14 | 7.5 | 4   | M4 |
| LM-14   | 8          | 9    | 14   | 26 | 50 | 17 | 10  | 5   | M5 |
| LM-14-1 | 8          | 9    | 14   | 26 | 70 | 17 | 10  | 5   | M5 |

\* Pilot bores are to be drilled into the part.

\* The left and right tap positions are not correlated as shown in the diagram.

## Standard Bore Diameter

| Model      | Standard bore diameter d1, d2 |   |      |   |   |   |     |       |    |    |    |      |    |  |
|------------|-------------------------------|---|------|---|---|---|-----|-------|----|----|----|------|----|--|
|            | 5                             | 6 | 6.35 | 7 | 8 | 9 | 9.5 | 9.525 | 10 | 11 | 12 | 12.7 | 14 |  |
| LM-6 (-1)  | ●                             | ● |      |   |   |   |     |       |    |    |    |      |    |  |
| LM-9 (-1)  |                               | ● | ●    | ● |   | ● |     |       |    |    |    |      |    |  |
| LM-14 (-1) |                               |   |      |   |   | ● | ●   | ●     | ●  | ●  | ●  | ●    | ●  |  |

\* Standard bore-drilled products do not have keyways. Keyways may be possible under some conditions. Contact Miki Pulley for details.

## How to Place an Order

LM-14-1 12-12

Size ——— Bore diameter: d1 (Small diameter)  
Total length ——— Bore diameter: d2 (Large diameter)  
Blank: Standard part  
1: Long type

## COUPLINGS

## ETP BUSHINGS

ELECTROMAGNETIC  
CLUTCHES & BRAKESSPEED CHANGERS  
& REDUCERS

## INVERTERS

## LINEAR SHAFT DRIVES

## TORQUE LIMITERS

## ROSTA

## SERIES

Metal Disc  
Couplings  
SERVOFLEX

High-rigidity  
Couplings  
SERVORIGID

Metal Slit  
Couplings  
HELI-CAL

Metal Coil Spring  
Couplings  
BAUMANNFLEX

Pin Bushing  
Couplings  
PARAFLEX

Link Couplings  
SCHMIDT

Dual Rubber  
Couplings  
STEPFLEX

Jaw Couplings  
MIKI PULLEY  
STARFLEX

Jaw Couplings  
SPRFLEX

Plastic Bellows  
Couplings  
BELLOWFLEX

Rubber and Plastic  
Couplings  
CENTAFLEX

## MODELS

ZG

LM

MM

MF

# MM Models

## Specifications


| Model  | Torque           |               | Misalignment     |                |               | Max. rotation speed<br>[min <sup>-1</sup> ] | Torsional stiffness<br>[N-m/rad] | Moment of inertia<br>[kg-m <sup>2</sup> ] | Mass<br>[kg] |
|--------|------------------|---------------|------------------|----------------|---------------|---------------------------------------------|----------------------------------|-------------------------------------------|--------------|
|        | Nominal<br>[N-m] | Max.<br>[N-m] | Parallel<br>[mm] | Angular<br>[°] | Axial<br>[mm] |                                             |                                  |                                           |              |
| MM-6K  | 2.5              | 5             | 0.3              | 3              | + 0.6         | 20000                                       | 143                              | $7.65 \times 10^{-7}$                     | 0.03         |
| MM-8K  | 5                | 10            | 0.3              | 3              | + 0.8         | 15000                                       | 286.5                            | $4.08 \times 10^{-6}$                     | 0.07         |
| MM-12K | 10               | 20            | 0.4              | 3              | + 1.0         | 12000                                       | 573                              | $1.43 \times 10^{-5}$                     | 0.14         |
| MM-14K | 10               | 20            | 0.5              | 3              | + 1.0         | 10000                                       | 573                              | $2.47 \times 10^{-5}$                     | 0.15         |
| MM-16K | 20               | 40            | 0.6              | 3              | + 1.2         | 9000                                        | 1146                             | $6.12 \times 10^{-5}$                     | 0.30         |
| MM-19K | 20               | 40            | 0.7              | 3              | + 1.2         | 8000                                        | 1146                             | $8.42 \times 10^{-5}$                     | 0.32         |
| MM-20K | 40               | 80            | 0.7              | 3              | + 1.6         | 7000                                        | 2292                             | $1.99 \times 10^{-4}$                     | 0.70         |
| MM-24K | 40               | 80            | 0.9              | 3              | + 1.6         | 7000                                        | 2292                             | $2.63 \times 10^{-4}$                     | 0.75         |
| MM-25K | 90               | 180           | 0.9              | 3              | + 2.0         | 6000                                        | 3438                             | $5.66 \times 10^{-4}$                     | 1.25         |
| MM-28K | 90               | 180           | 1.0              | 3              | + 2.0         | 6000                                        | 2865                             | $5.77 \times 10^{-4}$                     | 1.35         |
| MM-30K | 150              | 300           | 1.1              | 3              | + 2.5         | 5000                                        | 4297.5                           | $1.39 \times 10^{-3}$                     | 2.10         |
| MM-35K | 220              | 440           | 1.2              | 3              | + 3.2         | 4500                                        | 6303                             | $3.01 \times 10^{-3}$                     | 3.50         |

| Model    | Torque           |               | Misalignment     |                |               | Max. rotation speed<br>[min <sup>-1</sup> ] | Torsional stiffness<br>[N-m/rad] | Moment of inertia<br>[kg-m <sup>2</sup> ] | Mass<br>[kg] |
|----------|------------------|---------------|------------------|----------------|---------------|---------------------------------------------|----------------------------------|-------------------------------------------|--------------|
|          | Nominal<br>[N-m] | Max.<br>[N-m] | Parallel<br>[mm] | Angular<br>[°] | Axial<br>[mm] |                                             |                                  |                                           |              |
| MM-6K-S  | 2.5              | 5             | 0.3              | 3              | + 0.6         | 20000                                       | 143                              | $7.65 \times 10^{-7}$                     | 0.03         |
| MM-8K-S  | 5                | 10            | 0.3              | 3              | + 0.8         | 15000                                       | 286.5                            | $4.08 \times 10^{-6}$                     | 0.07         |
| MM-12K-S | 10               | 20            | 0.4              | 3              | + 1.0         | 12000                                       | 573                              | $1.43 \times 10^{-5}$                     | 0.14         |
| MM-16K-S | 20               | 40            | 0.6              | 3              | + 1.2         | 9000                                        | 1146                             | $6.12 \times 10^{-5}$                     | 0.30         |
| MM-20K-S | 40               | 80            | 0.7              | 3              | + 1.6         | 7000                                        | 2292                             | $1.99 \times 10^{-4}$                     | 0.70         |
| MM-25K-S | 90               | 180           | 0.9              | 3              | + 2.0         | 6000                                        | 3438                             | $5.66 \times 10^{-4}$                     | 1.25         |

\* Max. rotation speed does not take into account dynamic balance.

\* The moment of inertia and mass are measured for the maximum bore diameter.

## Dimensions

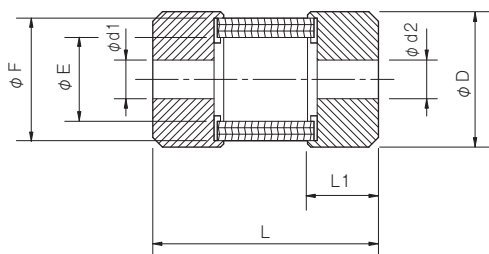

Unit [mm]

| Model  | d1 • d2    |      |      | D  | L   | L1   | E    | F    |
|--------|------------|------|------|----|-----|------|------|------|
|        | Pilot bore | Min. | Max. |    |     |      |      |      |
| MM-6K  | 2.5        | 3    | 8    | 16 | 20  | 6    | 11   | 15.5 |
| MM-8K  | 3.5        | 4    | 8    | 21 | 35  | 11   | 13   | 19   |
| MM-12K | 5.5        | 6    | 12   | 26 | 50  | 16.5 | 16.5 | 24   |
| MM-14K | 5.5        | 7    | 14   | 30 | 50  | 16.5 | 20.5 | 28   |
| MM-16K | 5.5        | 10   | 16   | 35 | 65  | 22   | 22.4 | 32   |
| MM-19K | 5.5        | 10   | 19   | 38 | 65  | 22   | 26.4 | 36   |
| MM-20K | 5.5        | 10   | 20   | 45 | 80  | 27   | 28   | 40   |
| MM-24K | 5.5        | 14   | 24   | 48 | 80  | 27   | 33   | 45   |
| MM-25K | 5.5        | 14   | 25   | 55 | 100 | 33.5 | 35   | 50   |
| MM-28K | 5.5        | 14   | 28   | 55 | 100 | 33.5 | 37   | 52   |
| MM-30K | 5.5        | 16   | 30   | 65 | 125 | 40   | 40.8 | 60   |
| MM-35K | 5.5        | 20   | 35   | 75 | 150 | 48   | 46   | 70   |

| Model    | d1 • d2    |      |      | D  | L   | L1   | E    | F    |
|----------|------------|------|------|----|-----|------|------|------|
|          | Pilot bore | Min. | Max. |    |     |      |      |      |
| MM-6K-S  | 2.5        | 3    | 8    | 17 | 25  | 9    | 11   | 15.5 |
| MM-8K-S  | 3.5        | 4    | 8    | 21 | 35  | 11   | 13   | 19   |
| MM-12K-S | 5.5        | 6    | 12   | 26 | 50  | 16.5 | 16.5 | 24   |
| MM-16K-S | 5.5        | 10   | 16   | 35 | 65  | 22   | 22.4 | 32   |
| MM-20K-S | 5.5        | 10   | 20   | 45 | 80  | 27   | 28   | 40   |
| MM-25K-S | 5.5        | 14   | 25   | 55 | 100 | 33.5 | 35   | 50   |

\* Pilot bores are to be drilled into the part.

## How to Place an Order

### MM-16K-S 12H-14N

Size  Bore diameter: d1 (Small diameter) - d2 (Large diameter)  
 Materials  Blank: Carbon steel and spring steel  
 Blank: Pilot bore  
 Blank: Bore specifications  
 Blank: Compliant with the old JIS standards (class 2) E9  
 H: Compliant with JIS standards H9  
 J: Compliant with JIS standards JS9  
 N: Compliant with motor standards


## Specifications

| Model  | Torque        |            | Misalignment  |             |            | Max. rotation speed [min <sup>-1</sup> ] | Torsional stiffness [N-m/rad] | Moment of inertia [kg-m <sup>2</sup> ] | Mass [kg] |
|--------|---------------|------------|---------------|-------------|------------|------------------------------------------|-------------------------------|----------------------------------------|-----------|
|        | Nominal [N-m] | Max. [N-m] | Parallel [mm] | Angular [°] | Axial [mm] |                                          |                               |                                        |           |
| MF-8K  | 5             | 10         | 0.3           | 3           | + 0.8      | 15000                                    | 286.5                         | $1.66 \times 10^{-5}$                  | 0.1       |
| MF-12K | 10            | 20         | 0.4           | 3           | + 1.0      | 12000                                    | 573                           | $3.32 \times 10^{-5}$                  | 0.16      |
| MF-16K | 20            | 40         | 0.6           | 3           | + 1.2      | 9000                                     | 1146                          | $9.18 \times 10^{-5}$                  | 0.31      |
| MF-20K | 40            | 80         | 0.7           | 3           | + 1.6      | 7000                                     | 2292                          | $2.12 \times 10^{-4}$                  | 0.5       |
| MF-25K | 90            | 180        | 0.9           | 3           | + 2.0      | 6000                                     | 3438                          | $5.33 \times 10^{-4}$                  | 0.9       |
| MF-30K | 150           | 300        | 1.1           | 3           | + 2.5      | 5000                                     | 4297.5                        | $1.35 \times 10^{-3}$                  | 1.7       |
| MF-35K | 220           | 440        | 1.2           | 3           | + 3.2      | 4500                                     | 6303                          | $2.86 \times 10^{-3}$                  | 2.8       |

\* Max. rotation speed does not take into account dynamic balance.

\* The moment of inertia and mass are measured for the maximum bore diameter.

## Dimensions

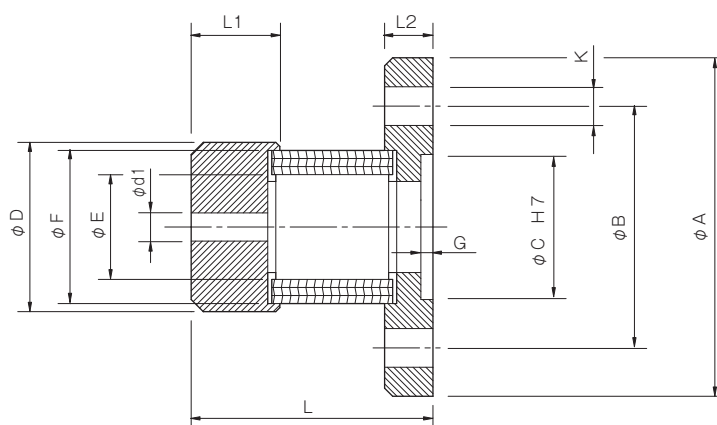

| Model  | d1         |      |      | D  | L   | L1   | L2  | A   | B    | C  | E    | F  | G   | K             |
|--------|------------|------|------|----|-----|------|-----|-----|------|----|------|----|-----|---------------|
|        | Pilot bore | Min. | Max. |    |     |      |     |     |      |    |      |    |     |               |
| MF-8K  | 3.5        | 4    | 8    | 21 | 30  | 11   | 6   | 42  | 30   | 18 | 13   | 19 | 1.5 | 3- $\phi$ 4.8 |
| MF-12K | 5.5        | 6    | 12   | 26 | 40  | 16.5 | 6   | 48  | 37   | 22 | 16.5 | 24 | 1.5 | 3- $\phi$ 4.8 |
| MF-16K | 5.5        | 10   | 16   | 35 | 50  | 22   | 6.5 | 58  | 47   | 30 | 22.4 | 32 | 1.5 | 4- $\phi$ 4.8 |
| MF-20K | 5.5        | 12   | 20   | 45 | 60  | 27   | 7   | 65  | 52   | 35 | 28   | 40 | 1.5 | 4- $\phi$ 4.8 |
| MF-25K | 5.5        | 14   | 25   | 55 | 75  | 33.5 | 8.5 | 75  | 62   | 42 | 35   | 50 | 1.5 | 6- $\phi$ 5.8 |
| MF-30K | 5.5        | 16   | 30   | 65 | 95  | 40   | 10  | 90  | 74.5 | 47 | 40.8 | 60 | 2.5 | 4- $\phi$ 7.0 |
| MF-35K | 5.5        | 20   | 35   | 75 | 115 | 48   | 13  | 100 | 84   | 57 | 46   | 70 | 2.5 | 6- $\phi$ 7.0 |

Unit [mm]

\* Pilot bores are to be drilled into the part.

## How to Place an Order

MF-16K 12H

Bore diameter: d1  
Blank: Pilot bore

Size

Bore specifications  
Blank : Compliant with the old JIS standards (class 2) E9  
H: Compliant with JIS standards H9  
J: Compliant with JIS standards JS9  
N: Compliant with motor standards

## COUPLINGS

## ETP BUSHINGS

ELECTROMAGNETIC  
CLUTCHES & BRAKESSPEED CHANGERS  
& REDUCERS

## INVERTERS

## LINEAR SHAFT DRIVES

## TORQUE LIMITERS

## ROSTA

## SERIES

Metal Disc  
Couplings  
SERVOFLEX

High-rigidity  
Couplings  
SERVORIGID

Metal Slit  
Couplings  
HELI-CAL

Metal Coil Spring  
Couplings  
BAUMANNFLEX

Pin Bushing  
Couplings  
PARAFLEX

Link Couplings  
SCHMIDT

Dual Rubber  
Couplings  
STEPFLEX

Jaw Couplings  
MIKI PULLEY  
STARFLEX

Jaw Couplings  
SPRFLEX

Plastic Bellows  
Couplings  
BELLOWFLEX

Rubber and Plastic  
Couplings  
CENTAFLEX

## MODELS

ZG


LM

MM

MF

# MM/MF Models

## Standard Hole-Drilling Standards

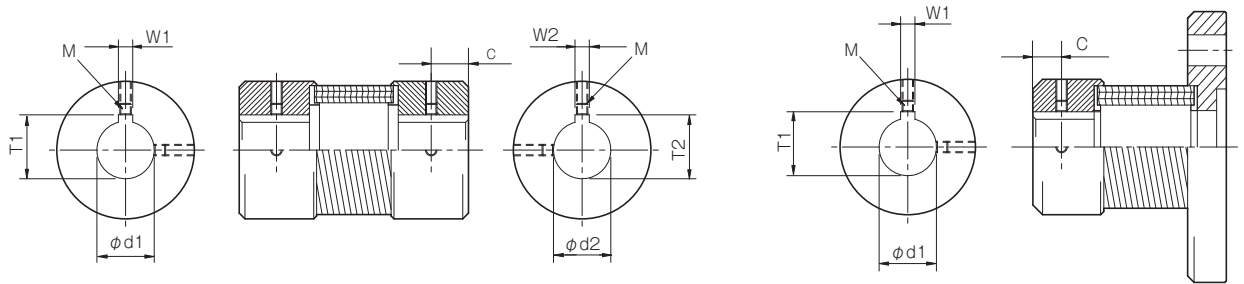

Unit [mm]

| Models compliant with the old JIS standard (class 2) JIS B 1301 1959 |                             |                               |                          |                    | Models compliant with the new JIS standard (H9) JIS B 1301 1996 |                          |                          |                          |                    | Models compliant with the new JIS standard (JS9) JIS B 1301 1996 |                          |                        |                          |                    | Models compliant with the motor standard JIS C 4210 2001 |                               |                         |                          |                    |
|----------------------------------------------------------------------|-----------------------------|-------------------------------|--------------------------|--------------------|-----------------------------------------------------------------|--------------------------|--------------------------|--------------------------|--------------------|------------------------------------------------------------------|--------------------------|------------------------|--------------------------|--------------------|----------------------------------------------------------|-------------------------------|-------------------------|--------------------------|--------------------|
| Nominal bore diameter                                                | Bore diameter [d1 • d2]     | Keyway width [W1 • W2]        | Keyway height [T1 • T2]  | Set screw hole [M] | Nominal bore diameter                                           | Bore diameter [d1 • d2]  | Keyway width [W1 • W2]   | Keyway height [T1 • T2]  | Set screw hole [M] | Nominal bore diameter                                            | Bore diameter [d1 • d2]  | Keyway width [W1 • W2] | Keyway height [T1 • T2]  | Set screw hole [M] | Nominal bore diameter                                    | Bore diameter [d1 • d2]       | Keyway width [W1 • W2]  | Keyway height [T1 • T2]  | Set screw hole [M] |
|                                                                      | Tolerance H7, H8            | Tolerance E9                  | —                        | —                  |                                                                 | Tolerance H7             | Tolerance H9             | —                        | —                  |                                                                  | Tolerance H7             | Tolerance JS9          | —                        | —                  |                                                          | Tolerance G7                  | Tolerance H9            | —                        | —                  |
| 4                                                                    | 4 $+0.018$ <sub>0</sub>     | —                             | —                        | 2-M3               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 5                                                                    | 5 $+0.018$ <sub>0</sub>     | —                             | —                        | 2-M3               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 6                                                                    | 6 $+0.018$ <sub>0</sub>     | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 6.35                                                                 | 6.35 $+0.022$ <sub>0</sub>  | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 7                                                                    | 7 $+0.022$ <sub>0</sub>     | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 8                                                                    | 8 $+0.022$ <sub>0</sub>     | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 9                                                                    | 9 $+0.022$ <sub>0</sub>     | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 9.5                                                                  | 9.5 $+0.022$ <sub>0</sub>   | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 9.525                                                                | 9.525 $+0.022$ <sub>0</sub> | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 10                                                                   | 10 $+0.022$ <sub>0</sub>    | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 11                                                                   | 11 $+0.018$ <sub>0</sub>    | —                             | —                        | 2-M4               | —                                                               | —                        | —                        | —                        | —                  | —                                                                | —                        | —                      | —                        | —                  | —                                                        | —                             | —                       | —                        | —                  |
| 12                                                                   | 12 $+0.018$ <sub>0</sub>    | 4 $+0.050$ <sub>+0.020</sub>  | 13.5 $+0.3$ <sub>0</sub> | 2-M4               | 12H                                                             | 12 $+0.018$ <sub>0</sub> | 4 $+0.030$ <sub>0</sub>  | 13.8 $+0.3$ <sub>0</sub> | 2-M4               | 12J                                                              | 12 $+0.018$ <sub>0</sub> | 4 $\pm 0.0150$         | 13.8 $+0.3$ <sub>0</sub> | 2-M4               | —                                                        | —                             | —                       | —                        | —                  |
| 14                                                                   | 14 $+0.018$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 16.0 $+0.3$ <sub>0</sub> | 2-M4               | 14H                                                             | 14 $+0.018$ <sub>0</sub> | 5 $+0.030$ <sub>0</sub>  | 16.3 $+0.3$ <sub>0</sub> | 2-M4               | 14J                                                              | 14 $+0.018$ <sub>0</sub> | 5 $\pm 0.0150$         | 16.3 $+0.3$ <sub>0</sub> | 2-M4               | 14N                                                      | 14 $+0.024$ <sub>+0.006</sub> | 5 $+0.030$ <sub>0</sub> | 16.3 $+0.3$ <sub>0</sub> | 2-M4               |
| 15                                                                   | 15 $+0.018$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 17.0 $+0.3$ <sub>0</sub> | 2-M4               | 15H                                                             | 15 $+0.018$ <sub>0</sub> | 5 $+0.030$ <sub>0</sub>  | 17.3 $+0.3$ <sub>0</sub> | 2-M4               | 15J                                                              | 15 $+0.018$ <sub>0</sub> | 5 $\pm 0.0150$         | 17.3 $+0.3$ <sub>0</sub> | 2-M4               | —                                                        | —                             | —                       | —                        | —                  |
| 16                                                                   | 16 $+0.018$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 18.0 $+0.3$ <sub>0</sub> | 2-M4               | 16H                                                             | 16 $+0.018$ <sub>0</sub> | 5 $+0.030$ <sub>0</sub>  | 18.3 $+0.3$ <sub>0</sub> | 2-M4               | 16J                                                              | 16 $+0.018$ <sub>0</sub> | 5 $\pm 0.0150$         | 18.3 $+0.3$ <sub>0</sub> | 2-M4               | —                                                        | —                             | —                       | —                        | —                  |
| 17                                                                   | 17 $+0.018$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 19.0 $+0.3$ <sub>0</sub> | 2-M4               | 17H                                                             | 17 $+0.018$ <sub>0</sub> | 5 $+0.030$ <sub>0</sub>  | 19.3 $+0.3$ <sub>0</sub> | 2-M4               | 17J                                                              | 17 $+0.018$ <sub>0</sub> | 5 $\pm 0.0150$         | 19.3 $+0.3$ <sub>0</sub> | 2-M4               | —                                                        | —                             | —                       | —                        | —                  |
| 18                                                                   | 18 $+0.018$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 20.0 $+0.3$ <sub>0</sub> | 2-M4               | 18H                                                             | 18 $+0.018$ <sub>0</sub> | 6 $+0.030$ <sub>0</sub>  | 20.8 $+0.3$ <sub>0</sub> | 2-M5               | 18J                                                              | 18 $+0.018$ <sub>0</sub> | 6 $\pm 0.0150$         | 20.8 $+0.3$ <sub>0</sub> | 2-M5               | —                                                        | —                             | —                       | —                        | —                  |
| 19                                                                   | 19 $+0.021$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 21.0 $+0.3$ <sub>0</sub> | 2-M4               | 19H                                                             | 19 $+0.021$ <sub>0</sub> | 6 $+0.030$ <sub>0</sub>  | 21.8 $+0.3$ <sub>0</sub> | 2-M5               | 19J                                                              | 19 $+0.021$ <sub>0</sub> | 6 $\pm 0.0150$         | 21.8 $+0.3$ <sub>0</sub> | 2-M5               | 19N                                                      | 19 $+0.028$ <sub>+0.007</sub> | 6 $+0.030$ <sub>0</sub> | 21.8 $+0.3$ <sub>0</sub> | 2-M5               |
| 20                                                                   | 20 $+0.021$ <sub>0</sub>    | 5 $+0.050$ <sub>+0.020</sub>  | 22.0 $+0.3$ <sub>0</sub> | 2-M4               | 20H                                                             | 20 $+0.021$ <sub>0</sub> | 6 $+0.030$ <sub>0</sub>  | 22.8 $+0.3$ <sub>0</sub> | 2-M5               | 20J                                                              | 20 $+0.021$ <sub>0</sub> | 6 $\pm 0.0150$         | 22.8 $+0.3$ <sub>0</sub> | 2-M5               | —                                                        | —                             | —                       | —                        | —                  |
| 22                                                                   | 22 $+0.021$ <sub>0</sub>    | 7 $+0.061$ <sub>+0.025</sub>  | 25.0 $+0.3$ <sub>0</sub> | 2-M6               | 22H                                                             | 22 $+0.021$ <sub>0</sub> | 6 $+0.030$ <sub>0</sub>  | 24.8 $+0.3$ <sub>0</sub> | 2-M5               | 22J                                                              | 22 $+0.021$ <sub>0</sub> | 6 $\pm 0.0150$         | 24.8 $+0.3$ <sub>0</sub> | 2-M5               | —                                                        | —                             | —                       | —                        | —                  |
| 24                                                                   | 24 $+0.021$ <sub>0</sub>    | 7 $+0.061$ <sub>+0.025</sub>  | 27.0 $+0.3$ <sub>0</sub> | 2-M6               | 24H                                                             | 24 $+0.021$ <sub>0</sub> | 8 $+0.036$ <sub>0</sub>  | 27.3 $+0.3$ <sub>0</sub> | 2-M6               | 24J                                                              | 24 $+0.021$ <sub>0</sub> | 8 $\pm 0.0180$         | 27.3 $+0.3$ <sub>0</sub> | 2-M6               | 24N                                                      | 24 $+0.028$ <sub>+0.007</sub> | 8 $+0.036$ <sub>0</sub> | 27.3 $+0.3$ <sub>0</sub> | 2-M6               |
| 25                                                                   | 25 $+0.021$ <sub>0</sub>    | 7 $+0.061$ <sub>+0.025</sub>  | 28.0 $+0.3$ <sub>0</sub> | 2-M6               | 25H                                                             | 25 $+0.021$ <sub>0</sub> | 8 $+0.036$ <sub>0</sub>  | 28.3 $+0.3$ <sub>0</sub> | 2-M6               | 25J                                                              | 25 $+0.021$ <sub>0</sub> | 8 $\pm 0.0180$         | 28.3 $+0.3$ <sub>0</sub> | 2-M6               | —                                                        | —                             | —                       | —                        | —                  |
| 28                                                                   | 28 $+0.021$ <sub>0</sub>    | 7 $+0.061$ <sub>+0.025</sub>  | 31.0 $+0.3$ <sub>0</sub> | 2-M6               | 28H                                                             | 28 $+0.021$ <sub>0</sub> | 8 $+0.036$ <sub>0</sub>  | 31.3 $+0.3$ <sub>0</sub> | 2-M6               | 28J                                                              | 28 $+0.021$ <sub>0</sub> | 8 $\pm 0.0180$         | 31.3 $+0.3$ <sub>0</sub> | 2-M6               | 28N                                                      | 28 $+0.028$ <sub>+0.007</sub> | 8 $+0.036$ <sub>0</sub> | 31.3 $+0.3$ <sub>0</sub> | 2-M6               |
| 30                                                                   | 30 $+0.021$ <sub>0</sub>    | 7 $+0.061$ <sub>+0.025</sub>  | 33.0 $+0.3$ <sub>0</sub> | 2-M6               | 30H                                                             | 30 $+0.021$ <sub>0</sub> | 8 $+0.036$ <sub>0</sub>  | 33.3 $+0.3$ <sub>0</sub> | 2-M6               | 30J                                                              | 30 $+0.021$ <sub>0</sub> | 8 $\pm 0.0180$         | 33.3 $+0.3$ <sub>0</sub> | 2-M6               | —                                                        | —                             | —                       | —                        | —                  |
| 32                                                                   | 32 $+0.025$ <sub>0</sub>    | 10 $+0.061$ <sub>+0.025</sub> | 35.5 $+0.3$ <sub>0</sub> | 2-M8               | 32H                                                             | 32 $+0.025$ <sub>0</sub> | 10 $+0.036$ <sub>0</sub> | 35.3 $+0.3$ <sub>0</sub> | 2-M8               | 32J                                                              | 32 $+0.025$ <sub>0</sub> | 10 $\pm 0.0180$        | 35.3 $+0.3$ <sub>0</sub> | 2-M8               | —                                                        | —                             | —                       | —                        | —                  |
| 35                                                                   | 35 $+0.025$ <sub>0</sub>    | 10 $+0.061$ <sub>+0.025</sub> | 38.5 $+0.3$ <sub>0</sub> | 2-M8               | 35H                                                             | 35 $+0.025$ <sub>0</sub> | 10 $+0.036$ <sub>0</sub> | 38.3 $+0.3$ <sub>0</sub> | 2-M8               | 35J                                                              | 35 $+0.025$ <sub>0</sub> | 10 $\pm 0.0180$        | 38.3 $+0.3$ <sub>0</sub> | 2-M8               | —                                                        | —                             | —                       | —                        | —                  |

### Set screw position

| Coupling size     | Distance C from edge [mm] |
|-------------------|---------------------------|
| 6                 | 3                         |
| 8                 | 5                         |
| 12 • 14           | 7                         |
| 16 • 19 • 20 • 24 | 10                        |
| 25 • 28 • 30 • 35 | 15                        |

### NOTE

- These standard bore drilling standards apply to BAUMANNFLEX MM/MF models.
- All standards starting from ø11 are the same as those in the old JIS standards column.
- Positions of set screws and keyways are not on the same plane.
- Set screws are included with the product.
- Positioning precision for keyway milling is determined by sight.
- Contact Miki Pulley when the keyway requires a positioning precision for a particular flange hub.
- Consult the technical documentation at the end of this volume for standard dimensions for bore drilling other than those given here.

# ZG/LM/MM/MF Models

## Items Checked for Design Purposes

### Special Items to Take Note of

You should note the following to prevent any problems.

- (1) Always be careful of parallel, angular, and axial misalignment.
- (2) Always tighten bolts with the specified torque.

### Precautions for Handling

- (1) The operating temperature range is -40°C to 120°C for ZG and LM models and -30°C to 100°C for MM and MF models. Note that the MM(K) and MF(K) types are not waterproof and cannot be used outdoors.
- (2) To prevent friction during operation, the MM and MF models are lightly lubricated with oil on their coil spring components. Do not clean them with degreasers.  
Note that when processing the inner diameter of pilot-bore products, cutting oil (particularly if water soluble) should be kept away from the coil spring component.
- (3) To get full coupling performance, mount couplings so that differences between coupling centers during operation are within the misalignment shown in the specifications table.  
The coupling should be mounted, however, so that the difference between centers is 50% or less of that misalignment value if rotation speed exceeds 2000 min<sup>-1</sup>.
- (4) Remove any rust, dust, oil or the like from the inner diameter surfaces of the shaft and coupling.
- (5) Be careful not to place more bending, tensile, or compressive load on the coupling than necessary when inserting a shaft into a coupling.
- (6) Tighten set screws with hex socket heads to the tightening torques shown below using a calibrated torque screwdriver or torque wrench.

| Size of hex-socket-head set screw | M3  | M4  | M5  | M6  | M8   |
|-----------------------------------|-----|-----|-----|-----|------|
| Tightening torque [N·m]           | 0.7 | 1.7 | 3.6 | 6.0 | 14.2 |

### Selection Procedures

- (1) Find the torque,  $T_a$ , applied to the coupling using the output capacity,  $P$ , of the driver and the usage rotation speed,  $n$ .

$$T_a [\text{N·m}] = 9550 \times \frac{P [\text{kW}]}{n [\text{min}^{-1}]}$$

- (2) Determine the service factor  $K$  from the usage and operating conditions, and find the corrected torque,  $T_d$ , applied to the coupling.

$$T_d [\text{N·m}] = T_a \times K_1 \times K_2 \times K_3$$

#### Service factor based on load property: $K_1$

|                 | Constant | Vibrations: Small | Vibrations: Medium | Vibrations: Large |
|-----------------|----------|-------------------|--------------------|-------------------|
| Load properties |          |                   |                    |                   |
| $K_1$           | 1.0      | 1.25              | 1.75               | 2.25              |

#### Service factor based on operating time: $K_2$

| Hrs./day | ~ 8 | ~ 16 | ~ 24 |
|----------|-----|------|------|
| $K_2$    | 1.0 | 1.12 | 1.25 |

#### Service factor based on starting/braking frequency: $K_3$

| Times/hr. | ~ 10 | ~ 30 | ~ 60 | ~ 120 | ~ 240 | Over 240 |
|-----------|------|------|------|-------|-------|----------|
| $K_3$     | 1.0  | 1.1  | 1.3  | 1.5   | 2.0   | *        |

\* Items marked with asterisks require consultations.

- (3) Set the size so that the nominal coupling torque  $T_n$  is at least equal to the corrected torque  $T_d$ .

$$T_n \geq T_d$$

- (4) Select a size that results in a maximum torque,  $T_m$ , for the coupling that is at least equal to the peak torque,  $T_s$ , generated by the driver, follower or both. Maximum torque refers to the maximum amount of torque that can be applied for a set amount of time considering eight hours of operation per day and up to around ten instances.

$$T_m \geq T_s$$

- (5) When the required shaft diameter exceeds the maximum bore diameter of the selected size, select a suitable coupling.

## COUPLINGS

### ETP BUSHINGS

### ELECTROMAGNETIC CLUTCHES & BRAKES

### SPEED CHANGERS & REDUCERS

### INVERTERS

### LINEAR SHAFT DRIVES

### TORQUE LIMITERS

### ROSTA

## SERIES

|                              |                                            |
|------------------------------|--------------------------------------------|
| Metal Couplings              | Metal Disc Couplings<br>SERVOFLEX          |
|                              | High-rigidity Couplings<br>SERVORIGID      |
|                              | Metal Slit Couplings<br>HELI-CAL           |
|                              | Metal Coil Spring Couplings<br>BAUMANNFLEX |
|                              | Pin Bushing Couplings<br>PARAFLEX          |
|                              | Link Couplings<br>SCHMIDT                  |
| Rubber and Plastic Couplings | Dual Rubber Couplings<br>STEPFLEX          |
|                              | Jaw Couplings<br>MIKI PULLEY<br>STARFLEX   |
|                              | Jaw Couplings<br>SPRFLEX                   |
|                              | Plastic Bellows Couplings<br>BELLOWFLEX    |
|                              | Rubber and Plastic Couplings<br>CENTAFLEX  |

## MODELS

|    |  |
|----|--|
| ZG |  |
| LM |  |
| MM |  |
| MF |  |