

# Stand-alone Belt-type Stepless Speed Changer

# T

Transmission capacity	0.2 kW to 2.2 kW
Speed change ratio	1:2 to 1:6
External pulley diameter	103 mm to 260 mm

## Speed Can Be Changed Freely



### Speed Can Be Changed Freely

This speed changer can be incorporated into a machine and used as part of the equipment.

**How to Place an Order**


**T-100**  
Size

### Specifications

Model	Transmission capacity [kW]	Belt	Speed change ratio	Mass [kg]
T-100	0.2	A	1 : 2	1.8
T-140	0.2	A	1 : 4	3.1
T-160	0.4	A	1 : 5	5.2
	0.75	B	1 : 3	
T-210	0.75	B	1 : 6	9.3
T-260	1.5	B	1 : 6	18
	2.2	C	1 : 3	

\* The T model is an intermediate wheel pulley to be incorporated into equipment. It is not for the maintenance of the L and U models.  
This product requires a moving device. Please contact with us for details.

### Dimensions

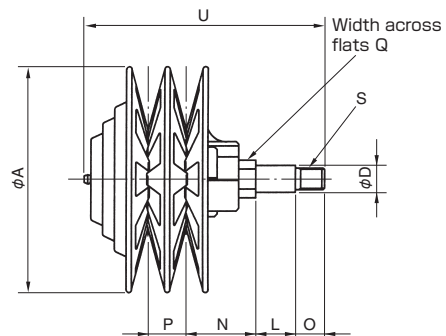

Model	Unit [mm]											
	A	P	N	L	O	U	D	S	Q	Min.P.D.	Mid.P.D.	Max.P.D.
T-100	103	19	40	25	15	135	16	M12	19	64	79	94
T-140	140	25	43	25	15	145	16	M12	19	60	98.5	131
T-160	170	29	53	30	22	185	20	M16	24	71	116	161
										95	127	159
T-210	212	37	62	40	22	215	26	M20	30	84	142	201
T-260	260	43	85	50	27	275	32	M20	36	99	174	249
										131	188	246